

UNDERWATER

LX-IG-B95



IP 68	IK 09	DC24V	TRIAC	PMW	1-10V	WALL
----------	----------	-------	-------	-----	-------	------

3 YEAR WARRANTY	CE	RoHS	50000h
--------------------	----	------	--------

HOUSING	Hard chromeplated molding shaped stainless steel SUS 316#
FRONT COVER	Hard chromeplated stainless steel SUS 316L#
LIGHT WINDOW	Step tempered glass. T=8mm
CABLE GLAND	IP68 PG-11 copper with nickel-coated
GASKET	Silicone gasket
PCB	Excellent heat conductivity aluminum. coefficient of heat Conductivity ≥ 2.0 w/mk
LED DRIVER	Constant Voltage Input, Constant Current Output
APPLICATION ENVIRONMENT	Temperature of water between -20°C~40°C less than 1 meter depth
BUILT-IN OVERHEAT SENSOR SYSTEM	Automatic Shutdown at 75°C
POWER CABLE	H07RN-F 2X1.0mm ² L=3.0m



luxio
L I G H T I N G

www.luxio-lighting.com

References



Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions
LX-IG-B95	9x1.5W	9pcs	DC24V	1054-1317lm	2000K/3000K /6000K	6°/13°/20°/30°/40°	IP68	Ø149*W61mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Water proof solution

- A Water stopper**(Included)
- B Water proof connector** IP68(Option)

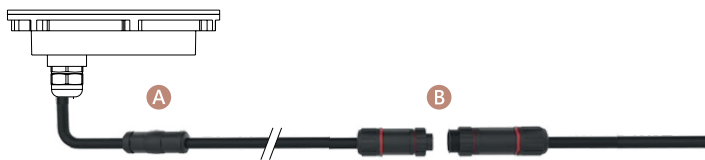

Dimensions

