

MAGNETIC TRACK LIGHT




LX-DL-M20I-30

IP 20	CRI >90	SDCM <3 Step	DC48V
-----------------	-------------------	------------------------	--------------

		CASAMBI
---	--	----------------

	CE	RoHS	50000h
---	-----------	-------------	---------------

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- CCT: 2700/3000/3500/4000K optional
- Light efficiency: 90 lm/W
- Lighting direction: downward
- Application: Indoor

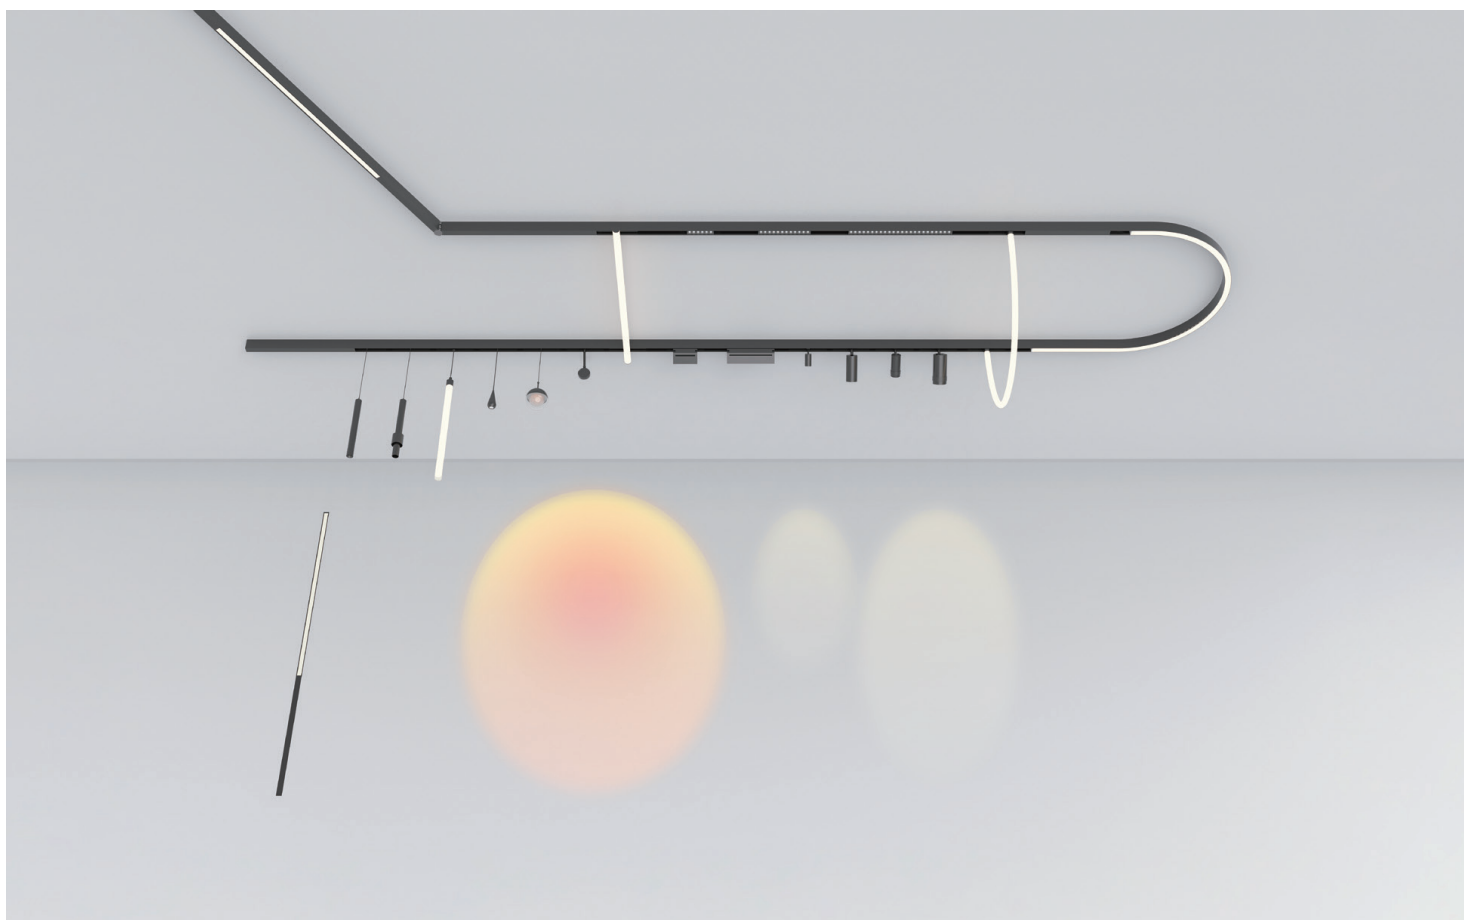

luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Input Voltage	Type Power	Max Power	Luminous flux	CRI	CCT/K	Beam Angle	IP Rating	Length
LX-DL-M20I-30	48VDC	5W	5.5W	300lm	>90	2700K	24°	IP20	1300mm
				310lm		3000K			
				320lm		3500K			
				330lm		4000K			
				300lm		2700K	36°		
				310lm		3000K			
				320lm		3500K			
				330lm		4000K			

1. The output data is based on the testing result of Ra90,4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

Dimensions

