


MAGNETIC TRACK LIGHT

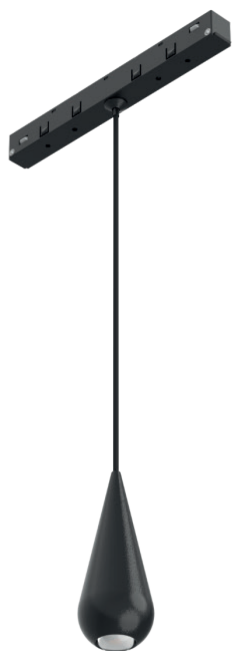


LX-DL-M20IW-40

IP 20	CRI >90	SDCM <3 Step	DC48V
----------	------------	-----------------	-------

		CASAMBI
---	--	---------

	CE	RoHS	50000h
---	----	------	--------

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- CCT: 2700/3000/3500/4000K optional
- Light efficiency: 93 lm/W
- Application: Indoor

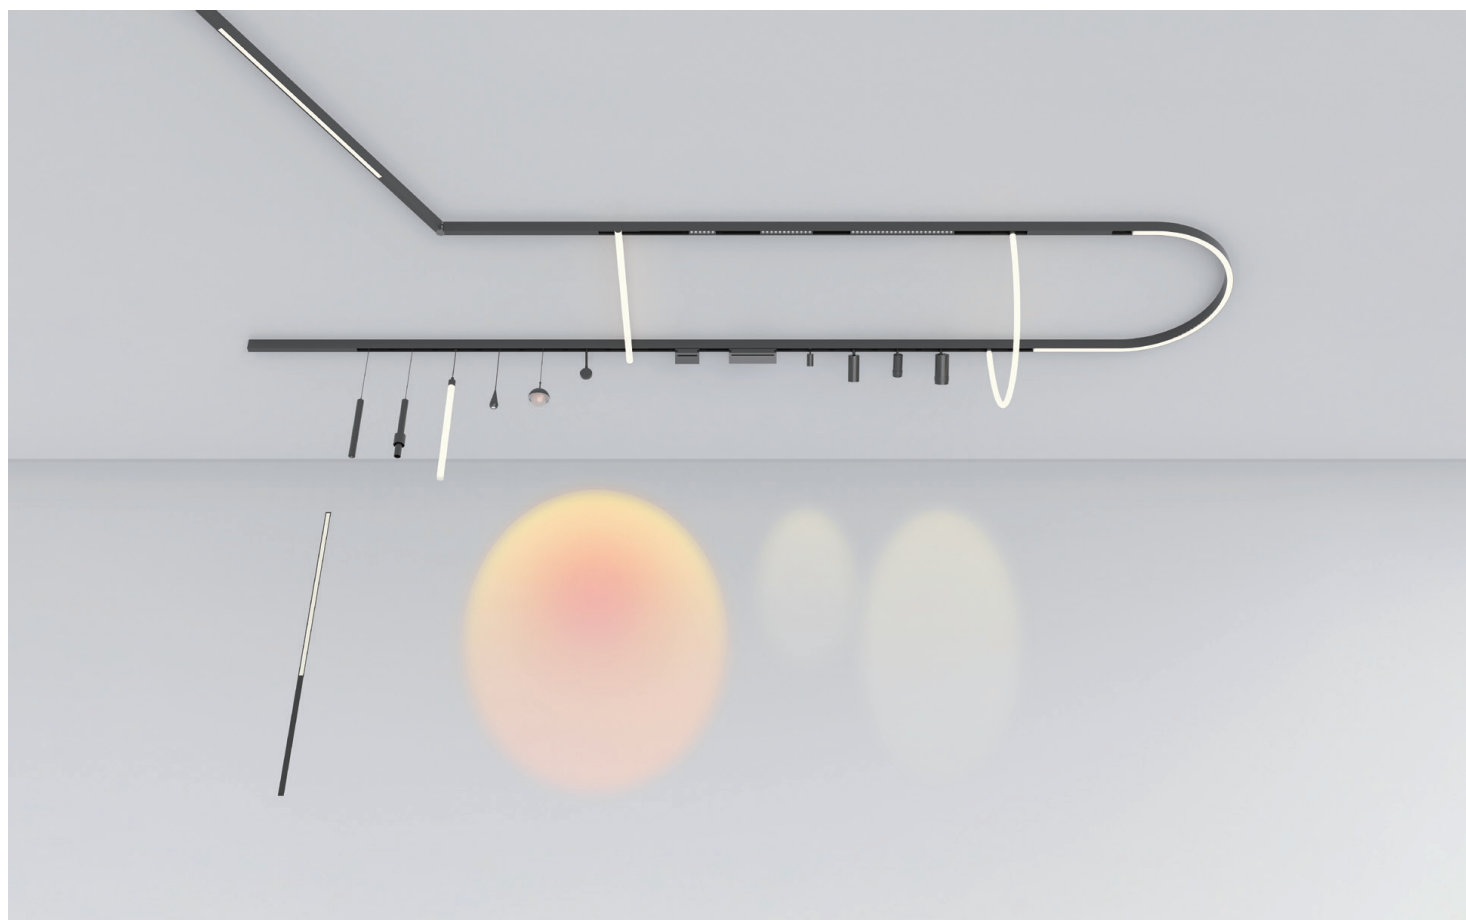

luxio
LIGHTING

www.luxio-lighting.com

References

Reference	Input Voltage	Type Power	Max Power	Luminous flux	CRI	CCT/K	Beam Angle	IP Rating	Length
LX-DL-M20IW-40	48VDC	3W	3.3W	250lm	>90	2700K	/	IP20	1150mm
				260lm		3000K			
				270lm		3500K			
				280lm		4000K			

1. The output data is based on the testing result of Ra90,4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

Dimensions

