

# MAGNETIC TRACK LIGHT




LX-DL-M20NK-25

<b>IP</b> 20	<b>CRI</b> >90	<b>SDCM</b> <3 Step	<b>DC48V</b>
-----------------	-------------------	------------------------	--------------

		<b>CASAMBI</b>
--	--	----------------

	<b>CE</b>	<b>RoHS</b>	<b>50000h</b>
--	-----------	-------------	---------------

- Material: Silicone Neon
- Coating: Black
- Length: 1000mm/1500mm/5000mm optional
- CCT: 2700/3000/3500/4000K optional
- Light efficiency: 70 lm/W
- Lighting direction: 360° round
- Application: Indoor

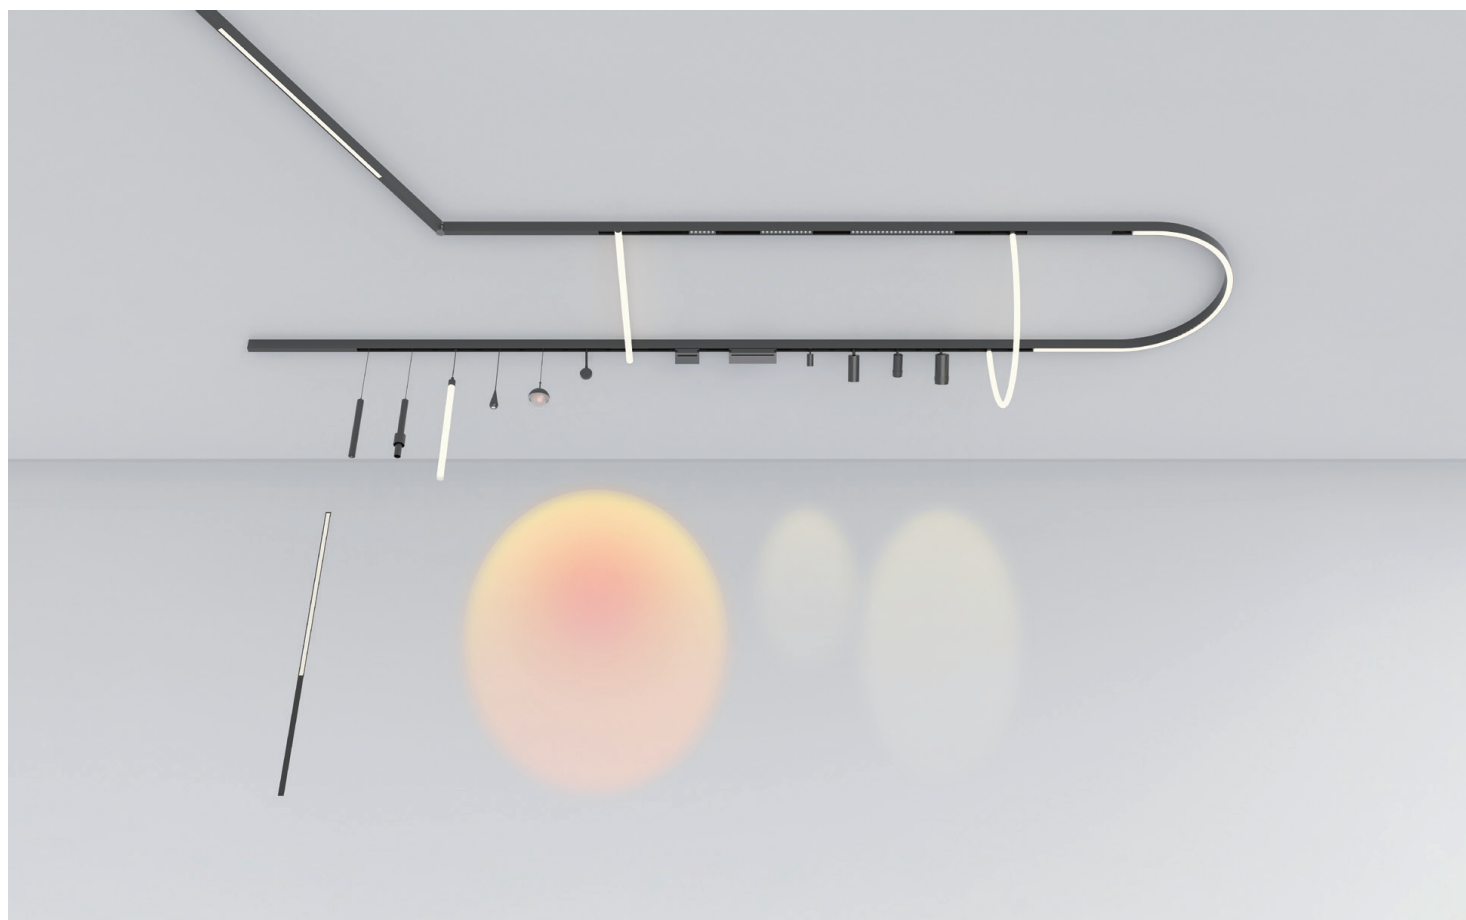

**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Input Voltage	Type Power	Max Power	Luminous flux	CRI	CCT/K	Beam Angle	IP Rating	Length
LX-DL-M20NK-25	48VDC	12W	13.2W	770lm	>90	2700K	360°	IP20	1000mm
				780lm		3000K			
				805lm		3500K			
				840lm		4000K			
		28W	30.8W	1790lm		2700K			2500mm
				1825lm		3000K			
				1875lm		3500K			
				1960lm		4000K			
		60W	66W	3840lm		2700K			5000mm
				3910lm		3000K			
				4020lm		3500K			
				4200lm		4000K			

1. The output data is based on the testing result of Ra90,4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

## Dimensions

