

PROFIL LIGHT




LX-PL-LG2727

24V	CRI >80/95	PF >0.9	IP 20
-----	---------------	------------	----------



LX-PL-LG2727

- Apply for inner Corner of wall edges and integrated into the wall by embedded design.
- Only 8mm's light-emitting surface outlining the decorative effects in a slim and exquisite manner.
- AL6063-T5 aluminum profile with high-quality surface treatment.
- Close-fitting design without screw, Make installation more convenient.

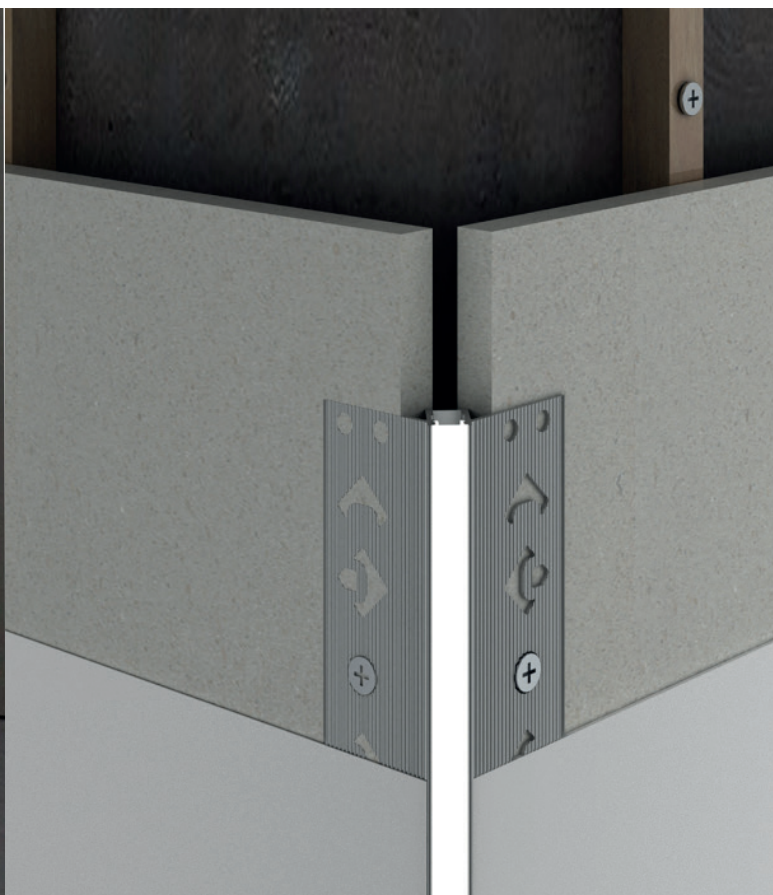

luxio
L I G H T I N G

www.luxio-lighting.com

Standard Configuration

Picture	Item	Parameter	Model
	Profile	Profile weight: 0.7kg/2.5m Size: L2500*W44.9*H22.2mm Material: AL6063-T5 Surface processing: Anodizing	/
	Cover	Type: Frosted diffuser Material: PC Light transmittance: 55% Size: L2500*W6.4*H3.7mm PC Feature: The diffuser will extend (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	/
	End caps	Size: L12*W7.8*H8mm Material: PC	LX-EC-LG2727

Optional Accessories

Picture	Item	Parameter	Model
	Black Cover	Type: Black diffuser Material: PC Light transmittance: 15% Size: L2500*W6.4*H3.7mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	LX-CV-LR0812
	Flexible strip LX-ST-D6140-24V-4mm	Material: FPC, CCT: 2700/3000/4000/6000K; Ra > 90; Voltage: 24V; Power: 6.6W/m; Lumen: 710Lm/m; PCB width: 4mm; Minimum cut: 50mm;	LX-ST-D6140-24V-4mm
	End cap with hole	Size: L12*W7.8*H8mm Material: PC	LX-EC-LG2727
	Screw	Size: M3.5*40mm Material: Carbon steel	LX-CL-01

Dimensions

