

PROFIL LIGHT

LX-PL-LM25FP

IP	CRI	24VDC
20	80/90	

5 YEAR WARRANTY	CE	RoHS	50000h
------------------------------	-----------	-------------	---------------



- 25mm slender lighting surface
- 120 LM/W high light efficiency design, lumen output up to 2375 Lm/m
- Multiple standard corner (L type, X type, T type optional), available for free connection.
- to meet variety application requirements.
- Provide surface mounted buckle, more convenient installation.
- Profile material AL6063-T5
- CCT : 2700K/3000K/3500K/4000K/5000K/6500K



luxio
L I G H T I N G

www.luxio-lighting.com

Optical & electronic data


	200mm (0.66')	600mm (2')	1200mm (4')	1500mm (5')	1800mm (6')	2400mm (8')	L*(277*277mm) (1'1"1')	T*(529*277mm) (1.7'1'1')	X*(529*529mm) (1.7'1.7')
Prismatic	/	12W / 1250LM	24W / 2500LM	30W / 3150LM	36W / 3750LM	48W / 5000LM	11W / 1155LM	16W / 1680LM	21W / 2205LM

Remark:


1 the tolerance of output data can be vary up to 10%;

2 the output data is typical value;


Standard length

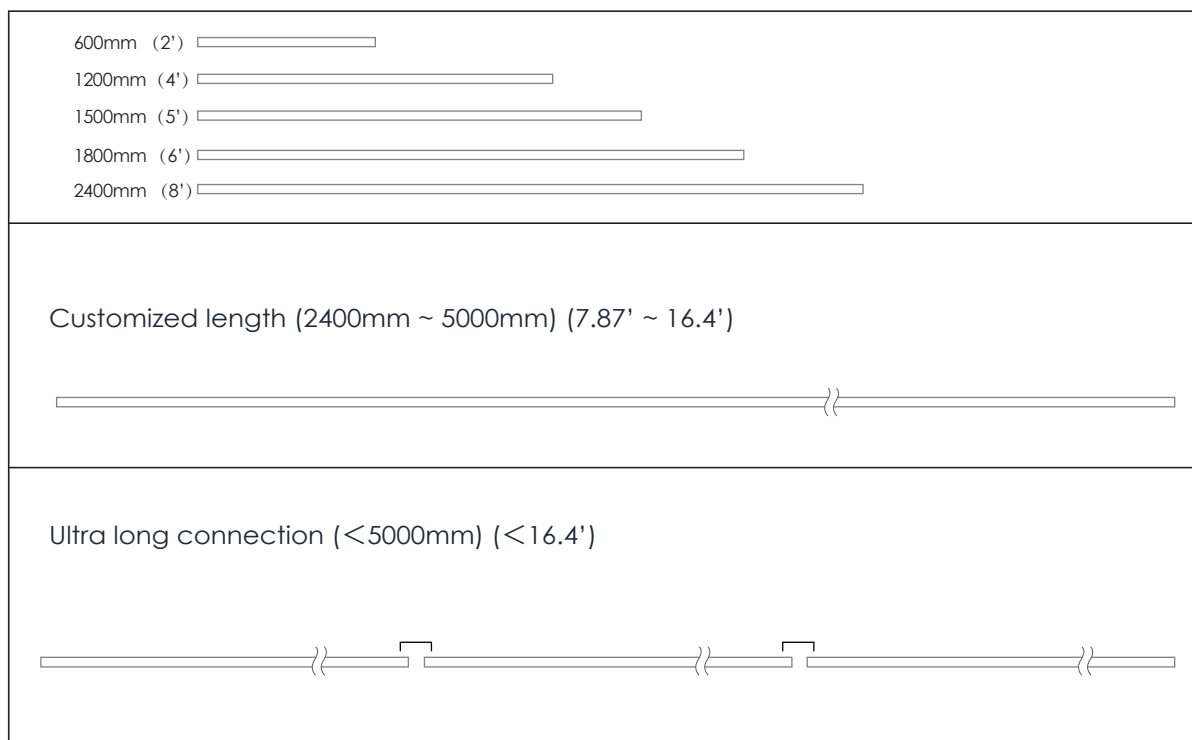


Dimensions

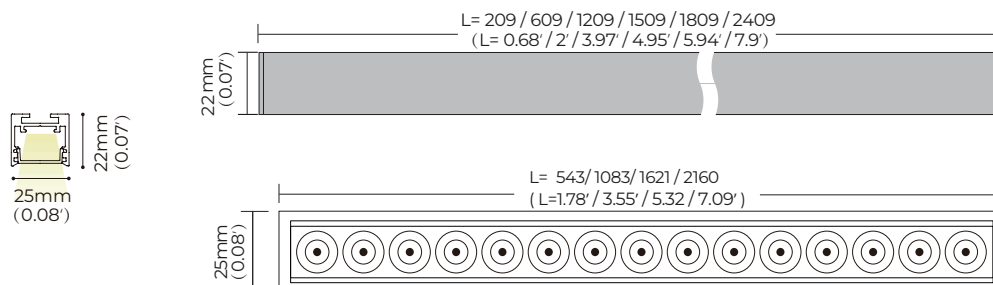

Corners

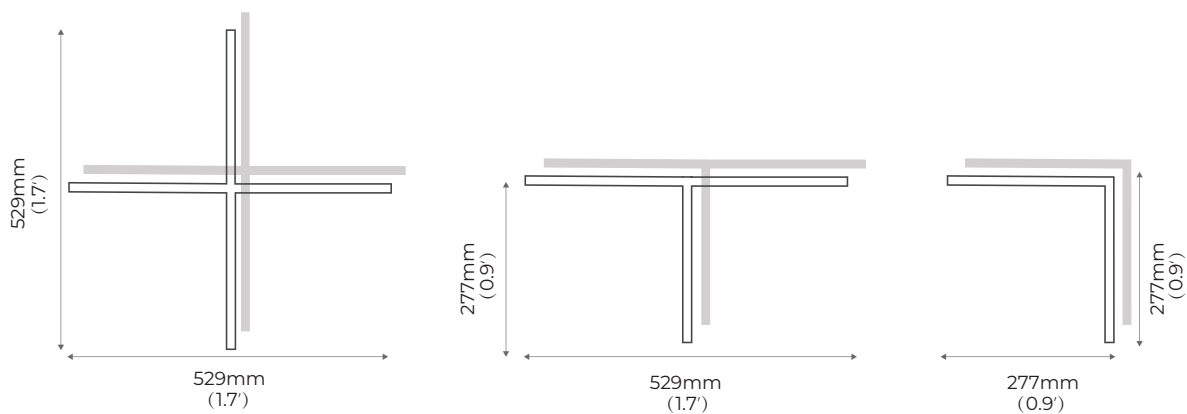

Lighting effect

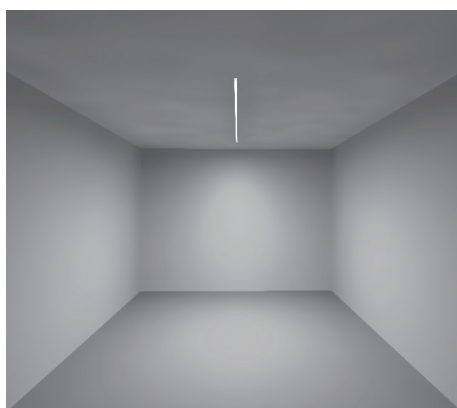

Prismatic