

STREET LIGHT



LX-SL-01-G3C

IP	IK	CRI	
66	08	>70	AC100-277V

5 GARANTIE	MW MEAN WELL	CE	CB	RoHS	IEC EN60598	50000hrs
----------------------	------------------------	-----------	-----------	-------------	-----------------------	-----------------

LED street light LX-SL-01-G3C

- Application : Tunnel light, Sports field, Parking lot, Garden, Residential area, Landscape, Architectural decorative lighting, Roads and other places.
- Housing Material: Alluminum alloy
- Easy Installation
- Operating Temp.: -40°C ~+50°C
- Operating Temp.: -40°C ~+80°C



References

Reference	Lamp power	Luminous Efficacy	CCT/K	OPTICS	Net Weight
LX-SL-01-G3C	30W	150lm/W	3000K/4000K/5000K /5700K	Type II-M(160°*80°) Type III-S(132°*89°) Type III-M(145°*70°) Type V(90°) 60°	5.0kg(11lbs)
	50W				
	60W				
	80W				
	100W				7.0kg(15.4lbs)
	120W				
	150W				
	180W				
	200W				8.5kg(18.7lbs)
	240W				

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Model Options



30W/50W/60W/80W




100W/120W/150W




180W/200W/240W


Dimensions(mm)

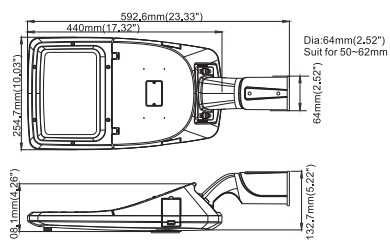

30W/50W/60W/80W

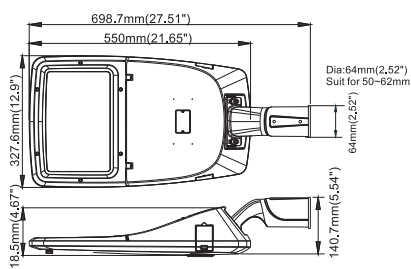

100W/120W/150W

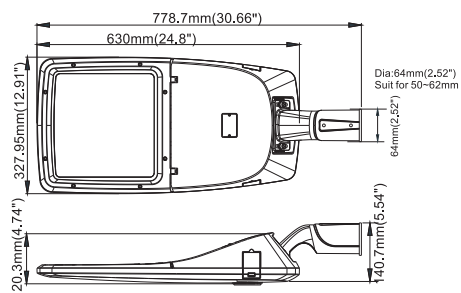

180W/200W/240W

Sensor Optional



Installation and use

