

STREET LIGHT



LX-SL-LEBA

IP 66	IK 08	PF >0.95	CRI >70/>80	8/6KV	DC24V /AC120-240V
Driver					
5 YEAR WARRANTY	LUXEON	PHILIPS			
CE	CB	RoHS	100.000hrs		

STREET LIGHT

Body : Aluminum Body
 Surface : Electrostatic powder paint
 Connectors : Stainless steel (304 grade)
 Gasket : EPDM Gasket (Hardness value A 20-25)
 Wind trap area 0.11 m²
 LED module Very powerful LEDs integrated on the PCB
 Serial wiring Single cable entry
 Galvanized steel housing and pole are powder coating with high corrosion resistance and chemical chromatised protection
 Stainless steel fasteners in grade 316
 Durable silicone rubber gasket
 Clear toughened glass
 he maximum wind load resistance is 100km/hrs



luxio
 L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Input Voltage	Luminous flux	CCT/K	IP Rating	Pole Top	Pole Height
LX-SL-LEBA	30W	DC24V / AC100-240V	3900-4200Lm	3000K/4000K /5000K	IP66	80x150mm	3000-6000mm
	60W		7500-7800Lm				
	80W		3900Lm				4000-9000mm

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Features

Models




Light distributions



Symmetric



Asymmetric

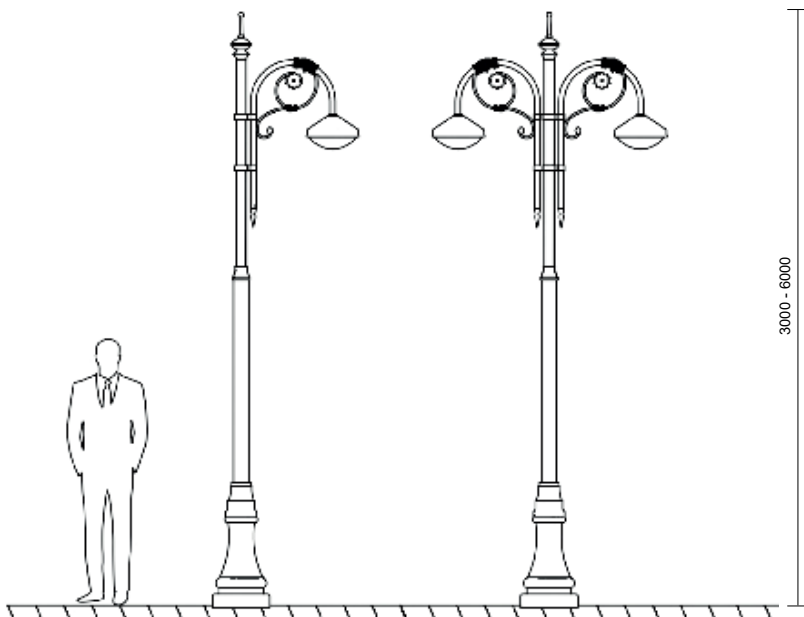

luxio
L I G H T I N G

www.luxio-lighting.com