

STREET LIGHT



LX-SL-LIYA

IP	IK	CRI	PF	AC220-240V	10KV	1-10V	DALI
66	08/09	>70-80	>0.95				

	CE	CB	RoHS	100 000hrs	
---	-----------	-----------	-------------	-------------------	---

LED PARK LIGHTS LX-SL-LIYA

Body Material : Aluminum Injection Body

Body Surface Coating : Electrostatic Powder Coating


Diffuser : 4 mm Tempered Glass

Optic : PC, PMMA Lens

Operating Temperature Range : Min -20 Max +55 °C

Colour Options : All RAL colours

Control Protocols (Optional) : 1-10V DALI ZigBee DMX

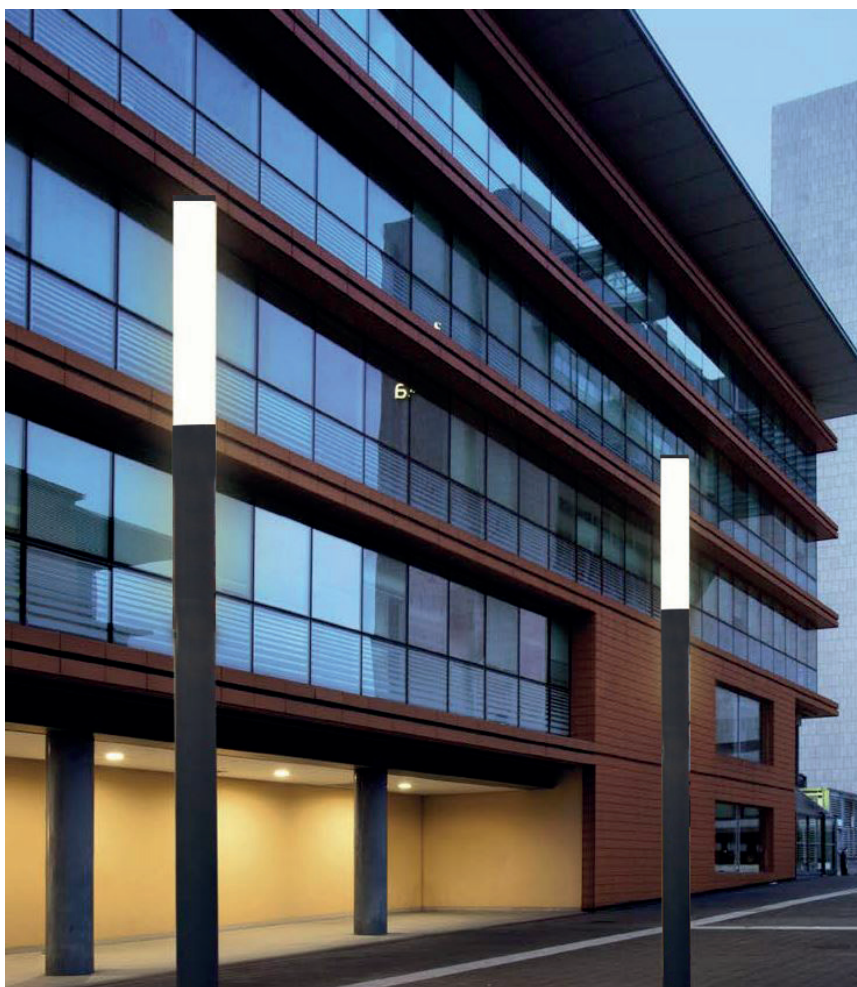

luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Input Voltage	Luminous flux	CRI	CCT/K	IP Rating	Dimensions
LX-SL-LIYA	30W	AC220-240V	4200lm	>80	3000K	IP66	(Ø80x150)/ (H3000-6000mm)
	60W		7800lm				
	30W		3900lm	>70	4000K		
	60W		7500lm				

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Dimensions(mm)

