

INGROUND

LX-IG-2130C



IP
67

DC24V/
AC100-240V



INGROUND

High power LED underground light, fashionable and beautiful appearance. The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti-corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's, meet the LED light body requirement for heat conduct to the outside of concrete and land, fully ensure the stability and long lifespan of LED fixture.

Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.

Adopt American CREE original LED light source, high flux output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.

Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

Ambient Temperature -25°~50°C / Ambient Humidity 10%~90%



luxio
L I G H T I N G

www.luxio-lighting.com


References

Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	Control Mode	OPTICS	IP Rating	Dimensions				
LX-IG-2130CB-24	40W	24pcs	DC36V AC100-240V	2600lm	2700K/3000K 4000K/6000K	DMX512 CC	8°/12.5°/20°/30°/45° /60°/15x30°/10x60°	IP67	Ø260*(W195 /146mm)				
				1600lm	RGB								
LX-IG-2130CA-24	30W	18pcs	DC24V AC100-240V	1950lm	2700K/3000K 4000K/6000K								
					1200lm					RGB			
LX-IG-2130CB-18	21W	18pcs	DC24V AC100-240V	1950lm	2700K/3000K 4000K/6000K								
					1200lm					RGB			
LX-IG-2130CA-18	21W	18pcs	DC24V AC100-240V	1365lm	2700K/3000K 4000K/6000K								
					840lm					RGB			
LX-IG-2130CF-9	72W	9pcs		2880lm	RGBW					DMX512	15°/20°/30°/15x60°		

Order code : Reference - Power - Luminous flux - CCT/K - Optic


Important : All the specification can be customized as per the project request .

OPTICS

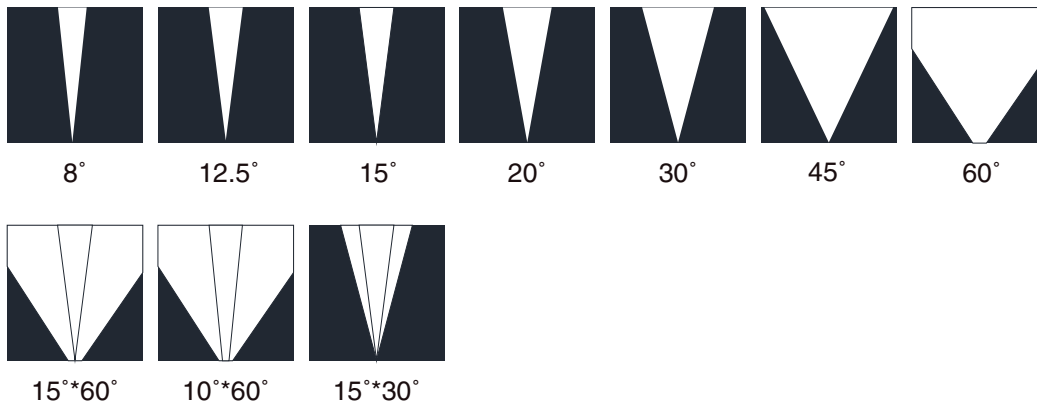

Dimensions

LX-IG-2130CA-24
LX-IG-2130CB-18
LX-IG-2130CA-18

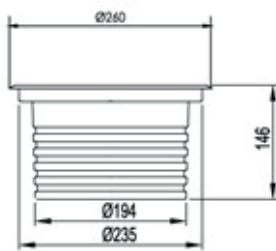

LX-IG-2130CB-24

