
# INGROUND



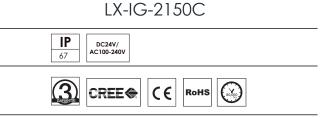

#### INGROUND

High power LED underground light, fashionable and beautiful appearance. The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti-corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's, meet the LED light body requirement for heat conduct to the outside of concrete and land, fully ensure the stability and long lifespan of LED fixture.

Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.

Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.

Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

Ambient Temperature -25°~50°C / Ambient Humidity 10%~90%



www.luxio-lighting.com


#### References

Reference	Led Power	Led Quantity	Input Voltage	Luminous flux	CCT/K	Controle Mode	OPTICS	IP Rating	Dimensions
LX-IG-2150CE-12	60W	12pcs	AC100-240V	6600lm	2700K/3000K 4000K/6000K	СС	3.5°/6°/12°/20°/30° /45°/60°/10x70°	IP67	Ø330*W260mm
LX-IG-2150CD-12	42W			3570lm					
LX-IG-2150CC-24	60W	- 24pcs	DC24V/ AC100-240V	5100lm	2700K/3000K 4000K/6000K	DMX512 CC DMX512 CC	8°/12.5°/20°/30°/45° /60°/15x30°/10x60°		
				2400lm	RGB				
LX-IG-2150CB-24	42W			3570lm	2700K/3000K 4000K/6000K				
				1680lm	RGB				
LX-IG-2150CF-12	100W	12pcs		6500lm	RGBW		15°/20°/30°/15x60°		


Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## OPTICS

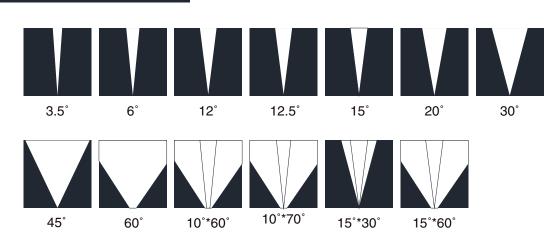

### Dimensions

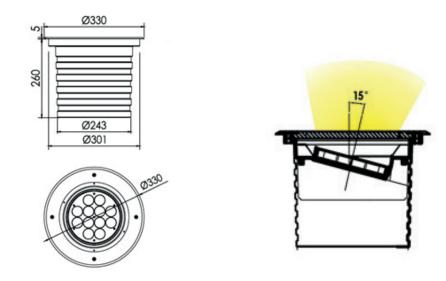



www.luxio-lighting.com